


Machine Speed

18 meters per minute (60 feet per minute) Minimum
183 meters per minute (600 feet per minute) Maximum

Material

LDPE, LLDPE, MDPE, and HDPE

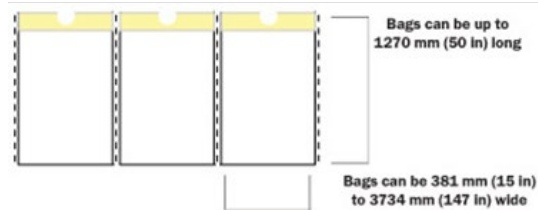

Sealing Specifications

Seal bars and perforation knife: 1270 mm (50 in)
Seal repeats from 381 mm (15 in) to 3734 mm (147 in)

Design Standards

CE, ISO, ANSI, and OSHA

Controls Platform

Rockwell/Allen-Bradley
AB Compact Logix PLC., AB Kinetix Servo System., AB Color Panel View Touch screen.
Phone Modem - Used for remote machine access
Video: [Request Video Access](#)

© CMD Corporation 8/22

CMD CORPORATION

www.cmd-corp.com

CMD Demo and Testing Center

3000 E. Pershing Street
PO Box 1279
Appleton, WI 54911 USA
Telephone (920) 730-6888
Fax (920) 380-8300

Headquarters and Manufacturing

2901 E. Pershing Street
PO Box 1279
Appleton, WI 54911 USA
Telephone (920) 730-6888
Fax (920) 380-8300

CMD Technology Center

3005 E. Pershing Street
PO Box 1279
Appleton, WI 54912-1899 USA
Telephone (920) 730-6885
Fax (920) 380-8300